

Index

Table Properties extended with color and cell border fields.....	1
Default table define with css and advances table sample.....	2
HTML and CSS code generated.....	3
Files Changed/Added.....	4

Table Properties extended with color and cell border fields

Default value is assumed if use does not enter a value in e.g. Border size, border style, spacing etc


The screenshot shows a 'Table Properties' dialog box from Mozilla Firefox. The title bar reads 'https://rbknet.dk - Table Properties - Mozilla Firefox'. The dialog is titled 'Table Properties' and contains the following settings:

- Rows: 4
- Columns: 2
- Header row:
- Width: 100 percent
- Height: pixels
- Background color: #66cc99 (with 'Select...' button)
- Border color: (with 'Select...' button)
- Class: <Not set>
- Alignment: <Not set>
- Cell border color: #ff0033 (with 'Select...' button)
- Border size: 2
- Cell spacing: 5
- Cell border size: 3
- Border style: <Not set>
- Cell padding: 4
- Cell border style: Dashed
- Caption:
- Summary:

At the bottom right, there are 'OK' and 'Cancel' buttons. The status bar at the bottom shows 'Done' and the URL 'rbknet.dk'.

Default table define with css and advances table sample

Default table defined, just by selecting "Header row". Advanced table defined with values on previous page. I does not look as much – but the intersing part is the small amount of html/css created (see next page)

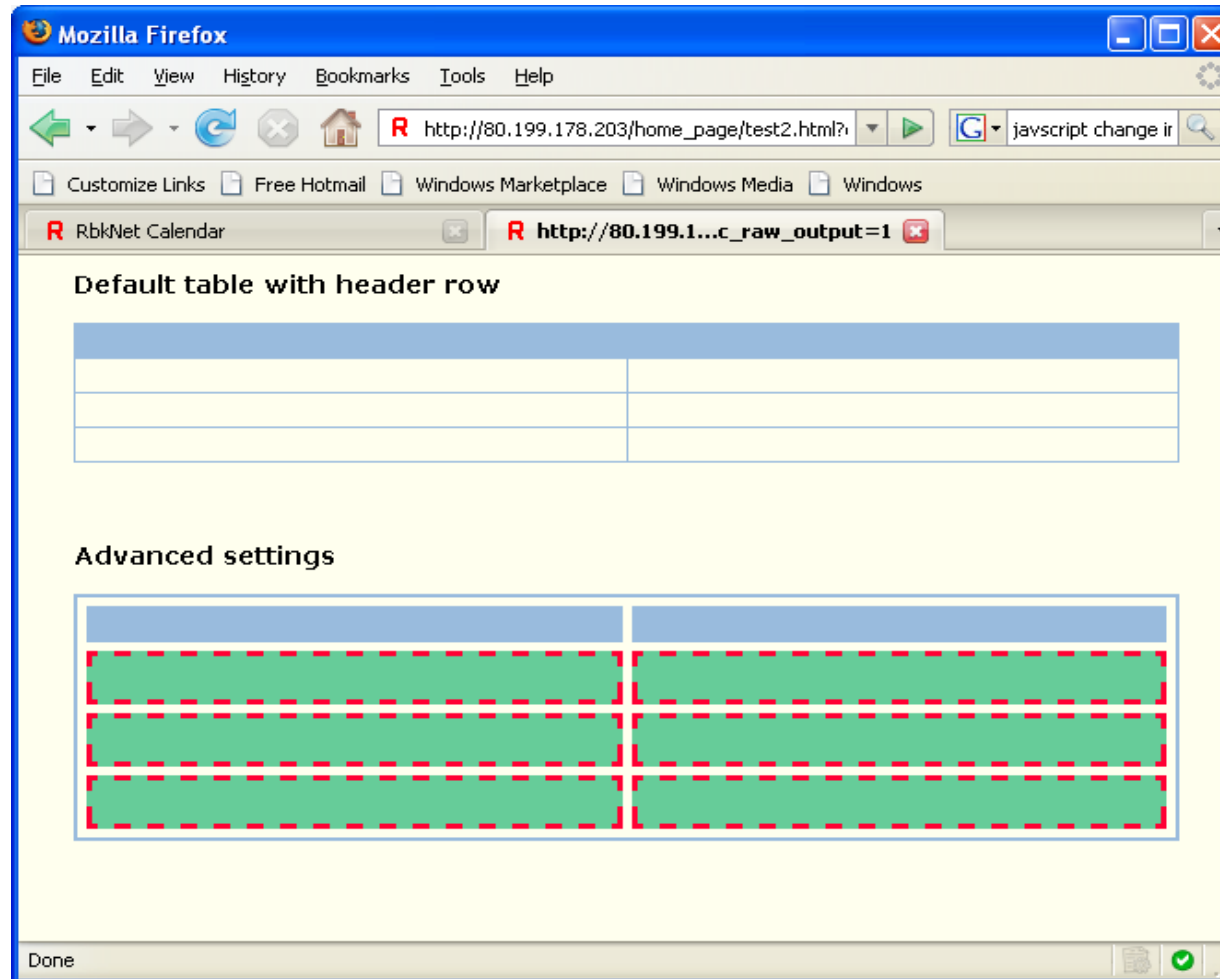

HTML and CSS code generated

```
Source of: file:///G:/Rbk/test.html - Mozilla Firefox
File Edit View Help

<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN">
<html lang="da">
<head>
<meta content="text/html; charset=ISO-8859-1" http-equiv="Content-Type">
<title></title>
<link rel="stylesheet" href="http://www.baptistkirke.dk/common/dac/theme/webeditor/daccontents.css" type="text/css">
<style type="text/css">
table#fckCSSRule4 td { background-color: #66cc99; border-width: 3; border-style: dashed; border-color: #ff0033; padding: 4; }
</style>

</head>
<body class="dacdiv">
<p><b>Default table with header row</b></p>

<table border="1" id="fckCSSRule3" style="width: 100%;">
<thead>
<tr> <th>&nbsp;</th> <th>&nbsp;</th> </tr>
</thead>
<tbody>
<tr> <td>&nbsp;</td> <td>&nbsp;</td> </tr>
<tr> <td>&nbsp;</td> <td>&nbsp;</td> </tr>
<tr> <td>&nbsp;</td> <td>&nbsp;</td> </tr>
</tbody>
</table>

<p><b>Advanced settings</b></p>

<table border="2" id="fckCSSRule4" style="border-width: 2px; width: 100%; border-collapse: separate; border-spacing: 5px;">
<thead>
<tr> <th>&nbsp;</th> <th>&nbsp;</th> </tr>
</thead>
<tbody>
<tr> <td>&nbsp;</td> <td>&nbsp;</td> </tr>
<tr> <td>&nbsp;</td> <td>&nbsp;</td> </tr>
<tr> <td>&nbsp;</td> <td>&nbsp;</td> </tr>
</tbody>
</table>
</body>
</html>

Line 10, Col 1
```

Files Changed/Added

fckeditor.setup\sample_css.php

Sample file that load a table and a the styles. Sample assumes /fckeditor and fckeditor.setup is located in the stite root folder

fckeditor.setup\css.config.js

config file for sample_css.php

fckeditor.setup\defaulttable.css

defines default table layout for the site

fckeditor\editor\dialog\common\rgbcolor.js

Helper scripts to nomalize color codes to #xxxxxx

fckwithcsstables\fckeditor\editor\dialog\fck_table.html

Table dialog change to handle styles added by fckEditor

fckwithcsstables\fckeditor\editor\dialog\fck_tablecell.html

Cell dialog change to handle styles added by fckEditor

fckwithcsstables\fckeditor\editor\js\fckeditorcode_ie.js

Table dialog must be wider (hack to avoid recompressing code)

fckwithcsstables\fckeditor\editor\js\fckeditorcode_gecko.js

Table dialog must be wider (hack to avoid recompressing code)

fckeditor\editor\plugins\csstable\fckplugin.js

Defines a listener/observer – to readd styles added by fck_table.html when html is replaced by eg ”Source view” code